


4800 Series



**Maximum Protection  
Against Break-Ins**

- Bolts The Door To The Frame At Up To 4 Independent Locations
- Steel Deadbolts Project One Full Inch In Each Direction
- Easy Operation: One Turn Of The Key Or Interior Knob Projects Or Retracts All Bolts Simultaneously
- Easy Installation On Any Solid Door
- Heavy-Duty Hardened Steel Guard Plate Protects Rim Cylinder (HG & BG Models)
- 4" Laminated Steel Bolts On Inswing Models Project Into Steel Strike Brackets Mounted On The Frame
- 5" Long, 5/8" Dia. Stainless Steel Deadbolts On Outswing Doors Bolt Into The Frame
- Dustproof Strike Provided For Rounded Lower Bolt On All 4-Point Models
- Interior Keyed Models Available



**Ideal For**

- Storage Rooms
- Security Closets
- Computer Rooms
- Audio-Visual Closets
- Residential Safe Rooms
- Cellular Telephone Sites

2-Point  
&  
3-Point  
Models  
Available



## Model Creation

MP Police Lock Offers Customization Choices In The Following Categories:

- **Locking Points** (2, 3 or 4)
- **Deadbolt Design** (Round or Square)
- **Interior Operation** (Turnpiece or Key)
- **Exterior Operation** (None or Keyed)
- **Door Size** (Standard, Wide or Tall)

### Building A Model #:

Create a model number by listing the elements in order. Examples:

#### 4840A-TTHG-37


- 1) Locking Points 4-Points
- 2) Bolt Type Deadbolts for inswing
- 3) Interior Operator Thumbturn
- 4) Exterior Operator "Hardguard™"
- 5) Door Size 3'x7' or less

#### 4840B-LTBG-48

- 1) Locking Points 4-Points
- 2) Deadbolts Deadbolts for outswing
- 3) Interior Operator Elongated Turnpiece
- 4) Exterior Operator "Bestguard™"
- 5) Door Size 4'x7' or less


#### 4822B-COXX-37

- 1) Locking Points 2-Point Vertical
- 2) Deadbolts Deadbolts for outswing
- 3) Interior Operator Key Operated
- 4) Exterior Operator None
- 5) Door Size 7' or less

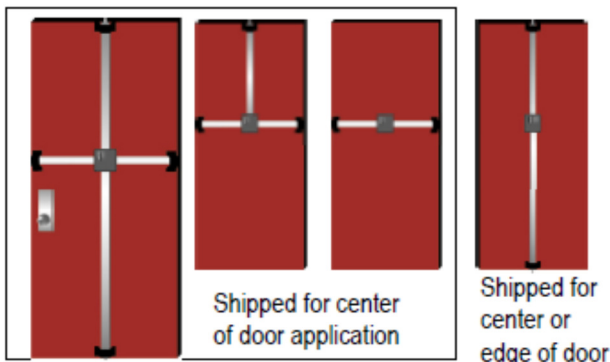

### Benefits of Multi-Point Locking:

Multi-point locking bolts the door to the frame at up to four independent locations. The typical break-in occurs when a burglar tries to pry the door from the frame at the lock area. Multi-point locking defeats this method by protecting the door like a bank vault lock.

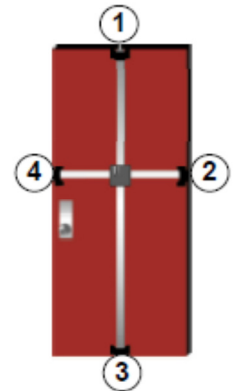

### Technical Information

#### Mechanism

Steel encased. No user serviceable parts. Shipped fastened to mounting plate.

#### Channels

Anodized aluminum, 18 gauge. May be field cut for shorter or narrower doors.

#### Threaded Rods

1/4" dia. May be field cut for shorter or narrower doors. Protected within aluminum channels.

#### Square Deadbolts

Laminated steel, 4" long, 5/8" high and 1-1/4" thick.

#### Rounded Deadbolts

Stainless Steel, 5" long, 5/8" dia.

#### Housing Cover

Single piece stamped steel, 13 gauge, powder coated black.

#### Warranty

15 years, exclusive of vandalism and abuse.

See Back Page For Additional Options (Ordered Separately)

### General Information

**DOOR & FRAME PREPARATION:** No Special Prep Required.

**HANDING:** Non-Handed.

**SIZE:** Shipped Standard For 3'x7' Door. Can Be Field Cut For Smaller Doors.

#### DOOR THICKNESS:

Designed For Doors 1-1/4" To 1-3/4" Thick. If Door Is Over 1-3/4", Order Thick Door Extension Kit.







#### CYLINDER:

Rim Cylinder With Long Tailpiece Required (except TG).




TG Requires Mortise Cylinder, Straight Yale Cam.

**Not To Be Used On Doors In Means Of Egress:  
See MP4900 Series For Emergency Exits**

### 1) Locking Points

|  |   |   |  |  |  |
|--|---|---|--|--|--|
| <b>4-Point Locking</b><br><b>4840</b><br><br>(2-Vertical, 2 Horizontal) | <b>2-Point Locking</b><br><b>4822</b><br><br>(Vertical) edge of door mounting<br><i>#4822 may be mounted near edge when used on a pair of doors with #4840 #4821 is used with #4945 series</i> | <b>4820</b><br><br>(Vertical) center door mounting | <b>3-Point Locking</b><br><b>4831</b><br><br>(2-Vertical, 1 Horizontal) | <b>4832</b><br><br>(Top Vertical, 2 Horizontal) | <b>4833</b><br><br>(2 Horizontal, Lower Vertical) |
|--|---|---|--|--|--|







### 2) Bolt Type (determined by door swing)

|   |  |  |
|---|--|--|
| <b>A Inswing Doors</b><br>Square laminated deadbolts project into strike brackets mounted on the frame.  | <b>B Outswing Doors</b><br>Rounded deadbolts project into holes drilled into the frame.  | <b>All Lower Vertical Deadbolts</b><br>Rounded deadbolts project into holes drilled into the saddle. Provided for inswing and outswing applications.  |
| <b>C Special square deadbolt model for outswing doors.</b>  |  |  |

### 3) Interior Operators

|  |   |  |
|--|---|--|
| <b>TT Thumbturn</b><br>Standard diamond-shaped turnpiece  | <b>LT Elongated Turnpiece</b><br>Easier-to-grasp longer turnpiece  | <b>CO Keyed Cylinder</b><br>Interior keyed operation (rim cylinder required)  |
|--|---|--|

### 4) Exterior Operation & GuardPlate

|  |   |  |  |  |  |  |
|--|---|--|--|--|--|--|
| <b>XX No Exterior Operation</b>                              | <b>HG HARD-GUARD</b>  | <b>BG BEST-GUARD</b>   | <b>SG SECURI-GUARD</b>   | <b>DG DUST-GUARD</b>   | <b>SR SECURI-GUARD REMOVABLE BAY</b>   | <b>TG THUMB-GUARD</b>  |
| No guard plate   | <br><b>HG</b><br>Thru-bolted with hardened steel layer | <br><b>BG</b> with removable core opening   | <br>Thru-bolted magnetic cylinder protector | <br>Sliding shield protects cylinder from elements | <br>Easy locking bay change | <br>Mortise cylinder required (not included)<br>Key unlocks thumbguard for easy release |
| Rim cylinder required for HG, BG, SG, DG & SR (not included) |   | SG & SR Models Include The SecuriGuard Magnetic Shield Cylinder Protector. The Cylinder Is Concealed Behind The Sliding Shield, Opened Only With A Magnetically Encoded Key. Millions Of Unique Key Codes Available. |  |  |  |  |


### 5) Size (Height & Width)

|  |  |  |  |  |
|--|--|--|--|--|
| <b>37</b><br>For doors up to 36" wide and 84" tall | <b>38</b><br>For doors up to 36" wide and 96" tall | <b>47</b><br>For doors up to 48" wide and 84" tall | <b>48</b><br>For doors up to 48" wide and 96" tall | Channels and rods may be field-cut for smaller sizes. Extension kits are provided to meet oversize requirements. Extension kits are available separately. See back page. |
|--|--|--|--|--|

## Customizing Accessories


### For Wider & Taller Doors

Use Extension Rods and Channels to lengthen horizontally or vertically



**MPK-EK6** 6" Kit

2 sets provided for doors up to 48" wide

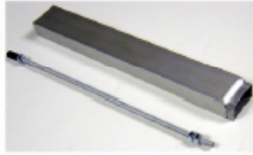

**MPK-EK12** 12" Kit


1 set provided for doors up to 96" tall



**MPK-EK24** 24" Kit

1 set provided for doors up to 108" tall

### Installation Aids



**MPK-SP8** Shims

Set of 4 thick and 4 thin shims to raise channels

**MPK-SB** Strike Bracket

Used only on inactive leaf of a pair of doors




**MPK-TD** Thick Door Kit

Extends guard plate for doors from 2-1/8" to 2-1/2"

### Additional Break-In Resistance Items

Thru-Bolt Plates mate with brackets for additional pry resistance

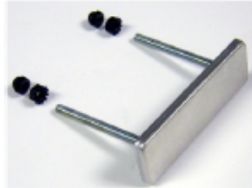


**MPK-TB2** Set of 2 plates

**MPK-TB3** Set of 3 plates

**MPK-TB4** Set of 4 plates

### Double Door

Horizontal Bolt on active leaf and Bracket to mount as a strike on inactive leaf of a pair



**MPM-ALB** Bolt & Bracket

Used on outswing doors only (replaces one horizontal round bolt)

### Custom Door Sizing

Factory prepared for sizes:

| Model #  | Door Size |
|----------|-----------|
| MPS-3084 | 30"x84"   |
| MPS-3080 | 30"x80"   |
| MPS-3284 | 32"x84"   |
| MPS-3280 | 32"x80"   |
| MPS-3484 | 34"x84"   |
| MPS-3480 | 34"x80"   |
| MPS-3884 | 38"x84"   |
| MPS-4084 | 40"x84"   |

### Options & Specials

Lock Status Indicator



**MPK-IN** Indicator

Visual indication of door status in upper channel

Door Monitor Switch



**MPK-MS** Monitor

Mounted in mechanism with armored cable across door; Switch activated when lock is turned to project or retract the deadbolts

**THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS**

**MPK-DS** Door Sign

Where required by code

**MPK-PC** Padlockable Cover

Covers exterior cylinder (padlock required)

**MPK-IL** Lever Handle

Larger interior operator



**MPK-ZB** Z-Bracket

For outswing applications where you cannot drill into the frame