

# Guardian Security Structures LLC



**Turn your entire room into a security center**

Instead of buying three different safes over a lifetime, AMSEC vault doors turn your room into a security center. It is designed for easy installation that retrofits a standard 80" x 30" or 80" x 36" opening. Make your vault room double as a storm shelter with our In-swing vault door. Offering the same features as our standard vault door, the In-swing vault door will insure opening from the inside even if debris has blocked the door.

**Standard Features of the Vault Door:**

- U.L. Listed Group II Lock with massive hard plate and two relocking devices.
- Spy-proof key-locking dial with matching five-spoke handle, pull handle and bold zinc die-cast logo. Available in polished brass, chrome or black nickel finish.
- 10 massive 1½" chrome-plated bolts. (Note: no deadbolts required on In-Swing door)
- Select from four textured finishes.
- Commercial grade, Vault Door hinges.
- 2 Stage Dual fire seals with silicone seal on door jamb and expandable Palusol™ seal on door.
- New - Adjustable door frame slides together to fit a wall thickness of 4-3/4" to 9-3/4".
- Safety Lock Release: allows you to safely exit the vault room from inside. It also allows you to close and lock the door from the inside when equipped with an electronic lock, turning your vault into a safe room.

**Special Features of the VD8030NF / VD8036NF:**

- 2" thick door offers a defense barrier constructed of a 1/8" inner and ¼" outer steel plates filled with a fire insulation material that provides a barrier against extreme heat.

**Special Features of the VD8030BF / VD8036BF:**

- 2" thick door offers a defense barrier constructed of a ½" steel plate door combined with 1" DryLight insulation that provides a barrier against extreme heat.

*VD8030NF  
Chocolate Brown with  
Black Nickel Hardware*

*New Interior Release Handle*

**PROUDLY MADE IN THE U.S.A.**

## Vault Doors

### VD8030BF / VD8036BF

**LOCKING BOLTS**  
**10** 1½"

**DOOR**  
1" DryLight  
¾" steel

Poured DryLight Fill


### VD8030NF / VD8036NF

**LOCKING BOLTS**  
**10** 1½"


**DOOR**  
½" inner  
¼" outer

Triple-Layer Fire Protection

### Color Options

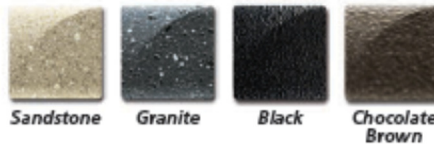

### Hardware Options

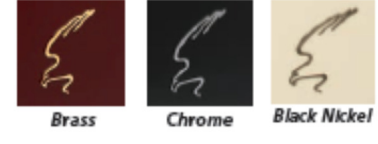

Model	Description	Wall Opening	Door Opening	Weight (Door Only)	Shipping Weight
VD8030NF	Vault Door	79½" x 29½"	77½" x 24-3/4"	523	667
VD8030NFIS	In-Swing Vault Door	79½" x 29½"	77" x 19-1/4"	505	649
VD8036NF	Vault Door	79½" x 35½"	77½" x 31-3/4"	612	782
VD8036NFIS	In-Swing Vault Door	79½" x 35½"	77" x 26-1/4"	575	745
VD8030BF	Vault Door	79½" x 29½"	77½" x 24-3/4"	695	839
VD8030BFIS	In-Swing Vault Door	79½" x 29½"	77" x 19-1/4"	672	816
VD8036BF	Vault Door	79½" x 35½"	77½" x 31-3/4"	819	989
VD8036BFIS	In-Swing Vault Door	79½" x 35½"	77" x 26-1/4"	792	962